


JL TRAIL TABLE

(TTJL-01)

1. Begin by measuring out the holes on the rear door for drilling.
2. All holes will be drilled to 13/16" diameter bit. It is highly recommended to measure hole placement on the vehicle and drill the holes with the plastic panel off the vehicle to prevent damage.
3. Use below image for measuring. All measurements are from a fixed point on the panel to the center of the hole.

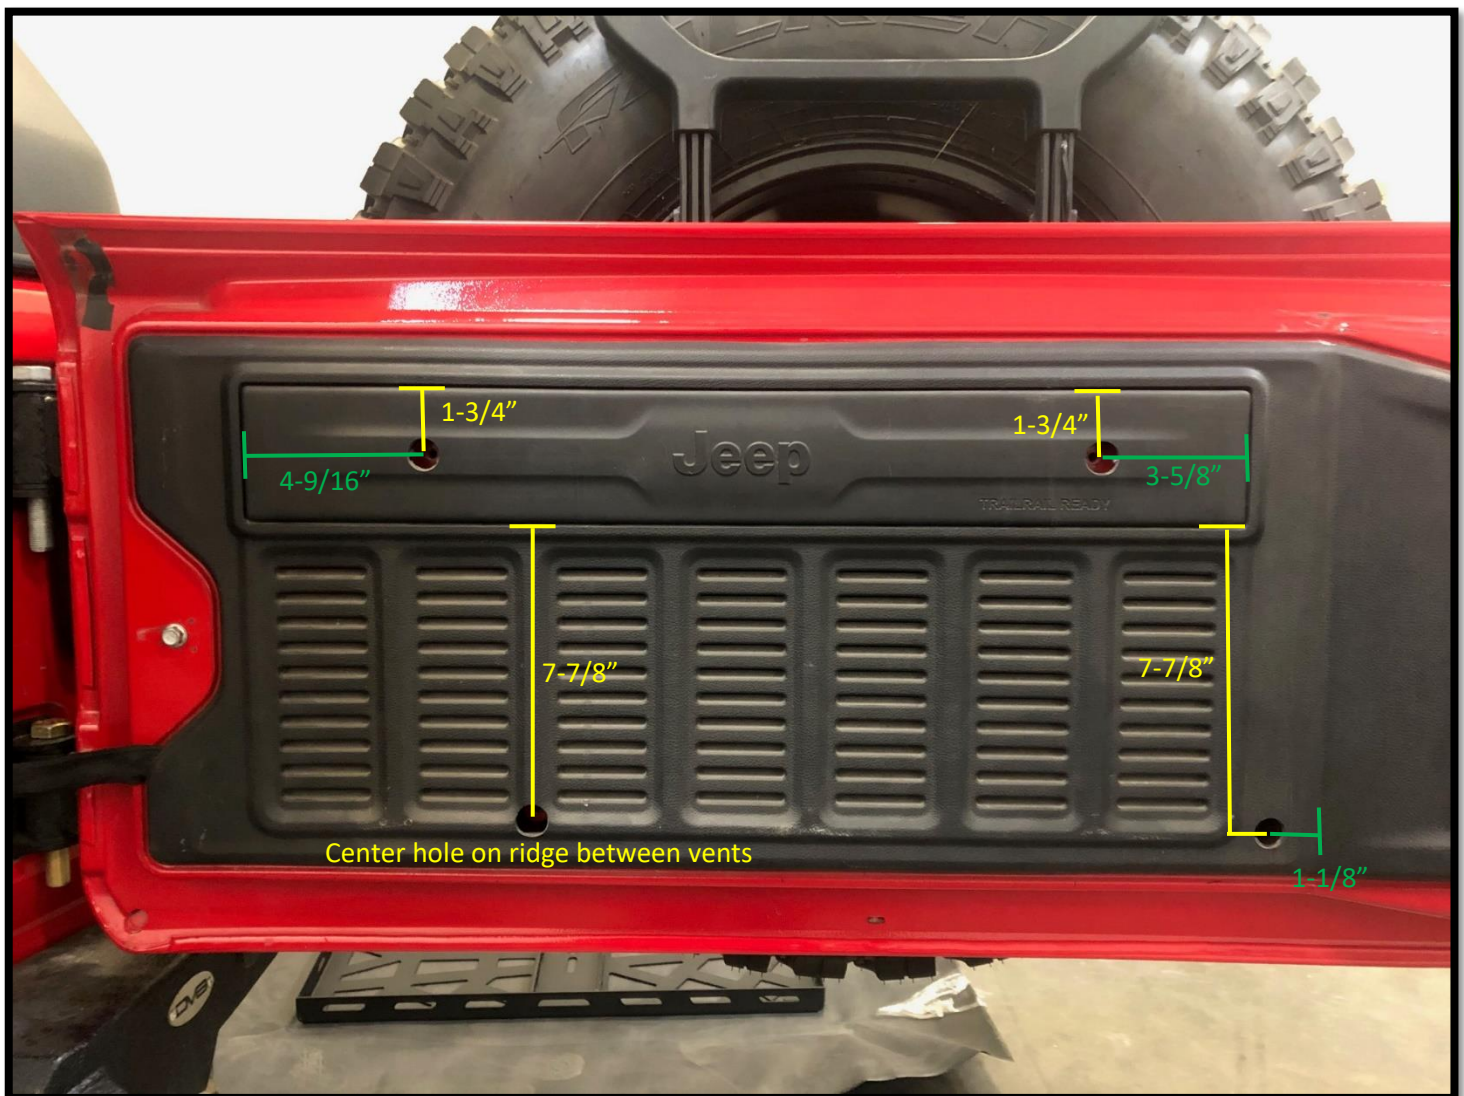

4. Once drilled, assemble gate table bracing as shown. Last bolt on bottom right will be inserted once table is mounted.



5. Once the table is assembled as shown above, mount the table onto the door using the provided (4) long bolts and the provided aluminum spacers. (**NOTE:** Long skinny spacers will be used on the bottom, and shorter thicker spacers on top holes.)



6. Secure table ties onto surround [here](#). Mount to the outside of the surround.



7. Mount lower half of table with provided hardware and spacers as shown.



If you have any question please email us at info@dv8offroad.com or call us at 951-680-9595.